


CG-A118 n-Phenylaminopropyltrimethoxysilane

Chemical Structure:

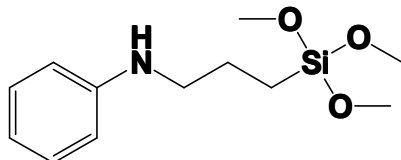

The Equivalent Products to other Manufacturers:

Momentive	Dowcorning	ShinEtsu	Degussa	Chisso
Y-9669	N.A	N.A	N.A	N.A

Typical Physical Properties

Product No.:	CG-A118
Chemical Name:	n-Phenylaminopropyltrimethoxysilane
CAS No.:	3068-76-6
EINECSNo.:	221-328-2
Formula:	C ₁₂ H ₂₁ NO ₃ Si
Appearance:	Colorless transparent liquid
Density(ρ 20, g/cm ³):	1.070 ± 0.010
Refractive Index(n _{25D}):	1.4225 ± 0.0050
Purity	98%

Applications:

CG-A118 is applied in plastic products (including cables, glassfiber-reinforcement plastics etc.), rubber products, adhesives, coatings, pigments dispersion, inks, magnetic materials (plastic magnet and rubber magnet), metallic casting resins and resins concrete, etc.

CG-A118 maximizes the physical and electrical properties of mineral-filled phenolics, epoxies, polyamides, polybutylene terephthalate, and a host of other thermoset and thermoplastic composites. Filler wetting and dispersibility in the polymer matrix are also improved.

CG-A118 improves adhesion between magnetic powder and organic resins and dispersion of magnetic powder inorganic resins. Also these magnetic appliances attain higher magnetic orientation and excellent magnetic properties, higher mechanical strength, good processability, excellent weathering resistance.

In glass-reinforced thermoset plastics, CG-A118 enhances the flexural, compressive, and interlaminar shear strengths before and after exposure to humidity. CG-A118 greatly improves wet electrical properties.

With nitrile, polysulfide, epoxy, urethane, and adhesives and sealants, CG-A118 improves pigment dispersion and maximizes adhesion to glass, aluminum, and steel.

Xizou Economic Development Zone Industrial Park, Qufu, Shandong, China

Tel: 86-537-4631088

Fax: 86-537-4631369

www.silanechem.com

sales@silanechem.com



When CG-A118 is used, glass-reinforced thermoplastics, polyamides, polyesters, and polycarbonates exhibit increased flexural and tensile strengths before and after wet exposure.

In glass fiber and mineral wool insulation, as a phenolics resin binder additive, CG-A118 imparts moisture resistance and allows recovery after compression.

In shell molding foundry applications, CG-A118 strengthens the bond between the phenolics binder and foundry sand.

In grinding wheels, CG-A118 promotes an improved, water-resistant bond between the abrasive grit and phenolics resin binder.

Packing:

210L Iron Drum: 200kg/drum

1000L IBC Container: 1000kg/container

Xizou Economic Development Zone Industrial Park, Qufu, Shandong, China

Tel: 86-537-4631088

Fax: 86-537-4631369

www.silanechem.com

sales@silanechem.com

