


CG-I823 iso-Octyltriethoxysilane

Chemical Structure:

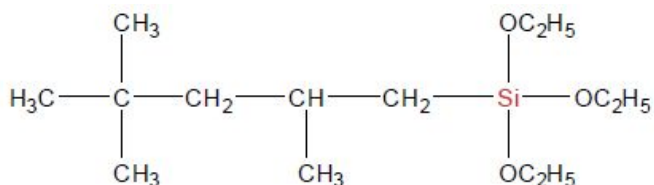

The Equivalent Products to other Manufacturers:

GE	Dowcorning	ShinEtsu	Degussa	Chisso
N.A	N.A	N.A	N.A	N.A

Typical Physical Properties

Product No.:	CG-I823
Chemical Name:	iso-Octyltriethoxysilane
CAS No.:	35435-21-3
EINECSNo.:	252-558-1
Formula:	C ₁₄ H ₃₂ O ₃ Si
Appearance:	Colorless transparent liquid
Density(ρ 20, g/cm3):	0.8790 ± 0.0050
Purity	95%

Applications:

Commercial buildings
 Parking decks/garages
 Highways
 Bridge structures
 Filler modification

Description

CG-I823 Silane is high purity, undiluted Noctyltriethoxy-silane. When diluted with an appropriate solvent, it can be used in the formulation of water repellent products. Upon proper application, the formulated product will penetrate and provide water repellency by chemically reacting with the cementitious substrate. Treated substrates are hydro-phobic and retain their original appearance.

CG-I823 Silane can also be used to improve the compatibility of mineral fillers or pigments in polyolefins or to ease their dispersion in nonpolar matrices.

Xizou Economic Development Zone Industrial Park, Qufu, Shandong, China

Tel: 86-537-4631088

Fax: 86-537-4631369

www.silanechem.com

sales@silanechem.com



CG-I823 Silane is a small molecule to allow for deep penetration into the cementitious surface. This material reacts with moisture in the air and on the substrate in the presence of an alkaline or acidic environment to produce hydroxy groups. These hydroxy groups will bond with the substrate and itself to produce a hydrophobic treatment that inhibits water absorption into the substrate. An alkaline environment, such as new concrete, will catalyze the reaction and speed the formation of the hydrophobic surface.

HOW TO USE

Dilution

CG-I823 Silane can be diluted in solvents such as alcohols, chlorinated solvents, aliphatic solvents and low molecular weight cyclic polydimethylsiloxane such as CG-D4 Cyclotetrasiloxane before use. Typical dilution levels are 40 percent and 20 percent CG-I823 Silane in a solvent.

Blends of the solvents can also be used. The evaporation rate of the diluted material can be modified depending on the type and concentration of the solvent. Select the proper solvent for your application, as some silane/solvent blends may darken the surface. Refer to the manufacturer's data sheet for proper handling and disposal of solvents.

Application

Methods of application include airless sprayer, roller and brush. When a brush or roller is used, repeated applications should be made until the surface remains moist for a few minutes. If an airless sprayer is used, application should continue until the substrate is thoroughly saturated. Sprayers should be fitted with solvent resistant hoses and gaskets.

A test application is necessary on each surface to be treated to ensure compatibility and the desired water repellent result. Surfaces should be free of standing water, surface dirt, dust, oils and other contaminants. Formulated CG-I823 Silane may be applied to damp surfaces although dry surfaces are preferred to achieve maximum penetration into the substrate.

Packing:

210L Iron Drum: 180kg/drum

1000L IBC Container: 880kg/container

Xizou Economic Development Zone Industrial Park, Qufu, Shandong, China

Tel: 86-537-4631088

Fax: 86-537-4631369

www.silanechem.com

sales@silanechem.com

